

Cromartie


WALL EXTRUDER – CH7120 INSTRUCTIONS FOR USE

The Cromartie CH7120 Wall Extruder has been designed for long life and ease of use. The machine is of simple construction but one which no studio pottery should be without as it really is a low cost versatile machine.

Installation

Unpack the wall extruder and check that no damage has occurred during transit, report any damage immediately. The wall extruder comes complete with fittings to fix the extruder to a solid brick wall or other suitable vertical surface.

Assemble the handle as per diagram.

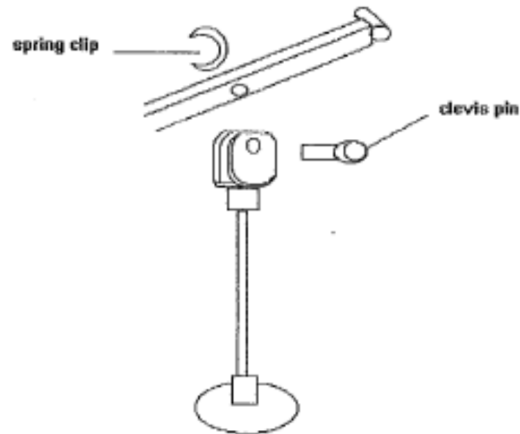

Operation

With a suitable die inserted in the die holder fill the chamber approximately halfway with clay. Insert the plunger on to the tube and the end of the handle through the T slot at the top of the extruder, move the handle to the first hooked position apply pressure to extrude clay, move the handle down to the next position and so on until movement is completed. To bring the plunger up place the end of the handle on the reverse of each hook to release the suction, return to the first position swing the plunger free of the tube, refill with clay and continue.

When you remove the handle for storage be careful not to damage the casting by applying any undue force. Ensure the extruder is emptied of clay if left for long periods of time.